




NOT ALL MIDLINES ARE CREATED EQUAL.

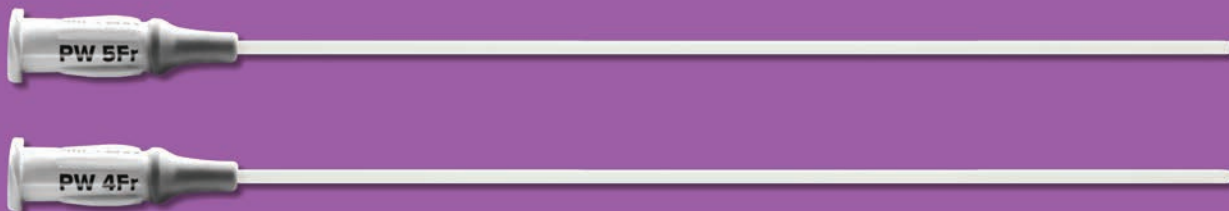

ONLY THE POWERWAND™ GIVES YOU:

- ✓ OVER 11,000 CATHETERS DAYS WITH ZERO BSIs¹
- ✓ UNPARALLELED POWER INJECTION PERFORMANCE (8ML/SEC, 325 PSI)
- ✓ KINK RESISTANCE ✓ HIGH FLOW (130-180 ML/MIN) ✓ BLOOD DRAWABILITY



THE POWERWAND™ – A MIDLINE WITHOUT EQUAL.

Infection Prevention:


Zero BSIs in over 11,000 catheter-days¹
The most studied catheter in it's class

Cost Savings:

Due to its performance, the POWERWAND resulted in an estimated \$448,000-\$531,570 of annual savings¹

Blood Drawability:

60-99%¹ blood drawability for full length of stay



Echogenic:

Echogenic properties of POWERWAND catheter allows for ultrasound visualization once in the vein

Kink Resistant:

Unlike other catheters, the unique material of the POWERWAND catheter is highly kink resistant, allowing for reliability during both insertion and dwell time



POWERWAND material



Standard catheter material

High Flow:

Highest flow rates of any midline catheter: 130-180 mL/min


Power Injection:

The best power injection performance rating on the market: 8mL/sec, 325 psi


Clean:

Demonstrates less fibrin and thrombus formation in comparison with BioFlo catheter (in-vivo)¹

3 minutes, Scanning Electron Microscope (In Vivo)




POWERWAND catheter




BioFlo catheter material

Non-Trimmable:

No trimming means a reduction in DVTs¹; there are no jagged edges on the thermoformed POWERWAND catheter



POWERWAND catheter



Trimmed Catheter

POWERWAND™ is a trademark of Access Scientific, LLC.

¹) Clinical data available upon request. Available data utilized AST version.

BioFlo is trademark of AngioDynamics, Inc.

LC-0392 Rev. B